


REVISIONS			
REV	DESCRIPTION	DATE	BY

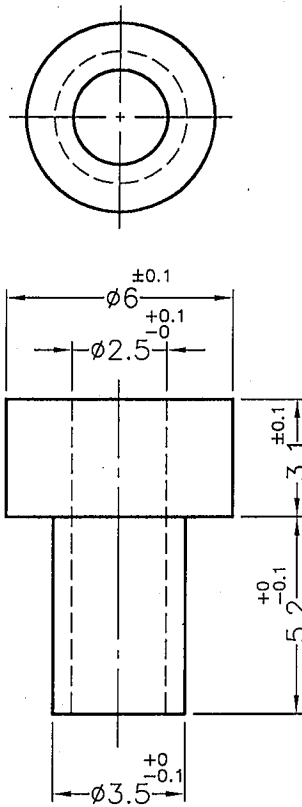

Component - Plastics

E207780

SABIC INNOVATIVE PLASTICS JAPAN L L C

PACIFIC GRADES - RESIN, 2-2 KINUGAOKA, MOKA-SHI TOCHIGI-KEN 321-4392 JP

500ECR(GG)(f2)

Polycarbonate (PC), glass reinforced, flame retardant, "Lexan", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	1.0	-	-	-	80	80	80
	1.6	-	-	-	80	80	80
	1.8	V-1	-	-	80	80	80
	2.0	-	-	-	80	80	80
	2.3	V-0	4	4	130	125	125
	3.0	V-0	4	4	130	130	130

Comparative Tracking Index (CTI): 3

High-Voltage Arc Tracking Rate (HVTR): -

Dielectric Strength (kV/mm): -

Dimensional Stability (%): -

High Volt, Low Current Arc Resis (D495): -

Volume Resistivity (10³ ohm-cm): -

(GG) - Denotes a global grade formulation previously in File E161759.

(f2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL.

NOTE - Material designation may be followed by a color nomenclature consisting of either an alpha/numeric or numeric/alpha combination.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 2001-04-06

Last Revised: 2003-12-16

Underwriters Laboratories Inc®




康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN) CO., LTD.
康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE		電晶體墊片		產品規格圖面	
MATERIAL		PC UL94V-0+GF		DATE	
FINISH				DRAWN	
COLOR		NATURAL		CHECK	
UNLESS OTHERWISE SPECIFIED TOLERANCE		SEE ABOVE		APPROVED	

PART NUMBER		DRAWING NUMBER	
TW-185PCV0		TW-185PCV0	
SIZE	SCALE	UNIT	REV
A4	5:1	mm	A

朱益建

Kang