


REVISIONS			
REV	DESCRIPTION	DATE	BY

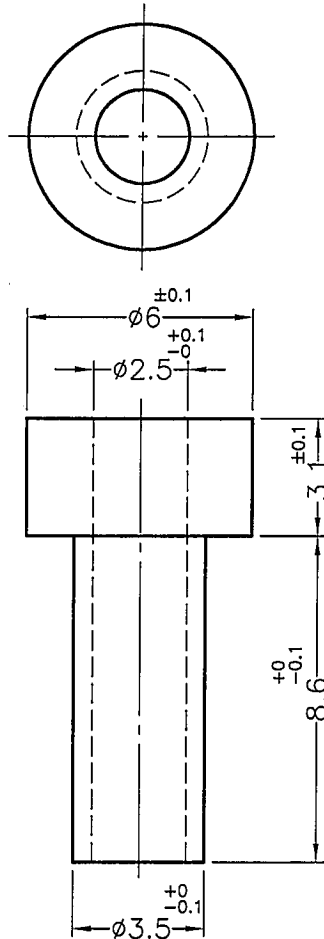

Component - Plastics

E207780

SABIC INNOVATIVE PLASTICS JAPAN L L C

PACIFIC GRADES - RESIN, 2-2 KINUGAOKA, MOKA-SHI TOCHIGI-KEN 321-4392 JP

500ECR(GG)(f2)

Polycarbonate (PC), glass reinforced, flame retardant, "Lexan", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HA1	RTI Elec	RTI Imp	RTI Str
ALL	1.0	-	-	-	80	80	80
	1.6	-	-	-	80	80	80
	1.8	V-1	-	-	80	80	80
	2.0	-	-	-	80	80	80
	2.3	V-0	4	4	130	125	125
	3.0	V-0	4	4	130	130	130

Comparative Tracking Index (CTI): 3

Dimensional Stability (%): -

High-Voltage Arc Tracking Rate (HVTR): -

High Volt, Low Current Arc Resis (D495): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ ohm-cm): -

(GG) - Denotes a global grade formulation previously in File E161759.

(f2) - Subjected to one or more of the following tests: Ultraviolet Light, Water Exposure or Immersion in accordance with UL 746C, where the acceptability for outdoor use is to be determined by UL.

NOTE - Material designation may be followed by a color nomenclature consisting of either an alpha/numeric or numerical/alpha combination.


ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 2001-04-06

Last Revised: 2003-12-16

Underwriters Laboratories Inc®



 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 電晶體墊片		產品規格圖面	
				MATERIAL PC UL94V-0+GF		DATE 2012.06.11	
				FINISH		DRAWN C. S. L	
				COLOR NATURAL		CHECK 	
				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
PART NUMBER TW-186PCV0		DRAWING NUMBER TW-186PCV0					
SIZE A4	SCALE 5:1	UNIT mm	REV A				