


REVISIONS			
REV	DESCRIPTION	DATE	BY

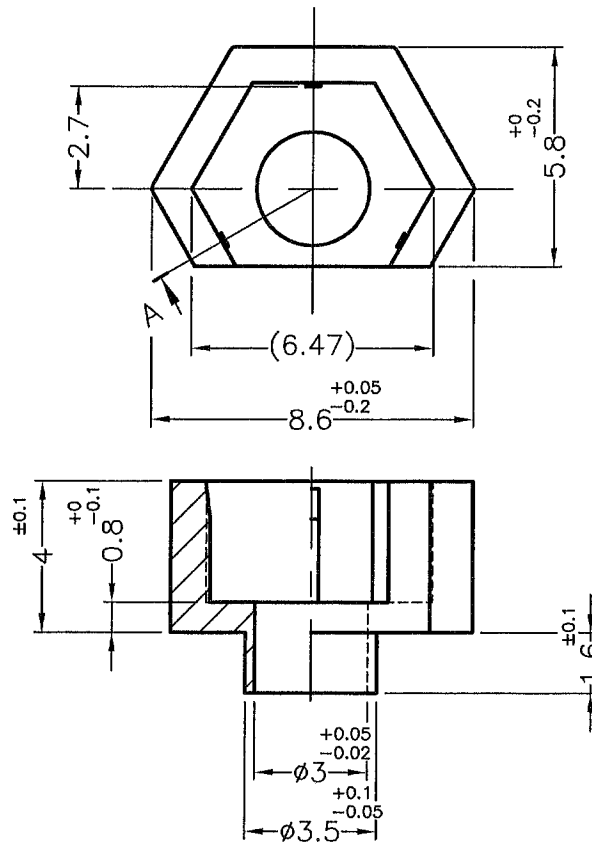

SECTION A-A

QMF22 Component - Plastics

Tuesday, May 25, 2004

E47960

DSM ENGINEERING PLASTICS B.V.

POSTBUS 43 6130 AA SITTARD THE NETHERLANDS

Material Designation: TE250F6(h1)(j)

Product Description: Polyamide 4/6 (PA4/6), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.35	V-0	-	-	-	-	-	-	-
	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3	V-0	0	0	140	130	130	-	-

IEC CTI:

CTI: 2

HVTR: 1

D495: 6

Dielectric Strength (kV/mm): 23

Volume Resistivity (10¹⁰ ohm-cm): -

IEC Ball Pressure (C): -
Dimensional Stability(%): 0.0

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

(h1)

Virgin and regrind, up to 50% by weight inclusive, in thicknesses of 0.75mm and greater, have the same basic material characteristics, except for CTI.

(j)

Virgin and regrind, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE BUSHING		產品規格圖面	
MATERIAL NYLON 46 UL94V-0		DATE 2012.10.03	
FINISH		DRAWN C.S.L	
COLOR NATURAL		CHECK 王日賜	
UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.2		APPROVED Kang	

PART NUMBER

TW-190N46

DRAWING NUMBER

TW-190N46

SIZE

A4

SCALE

5:1

UNIT

mm

REV

A