


REVISIONS			
REV	DESCRIPTION	DATE	BY

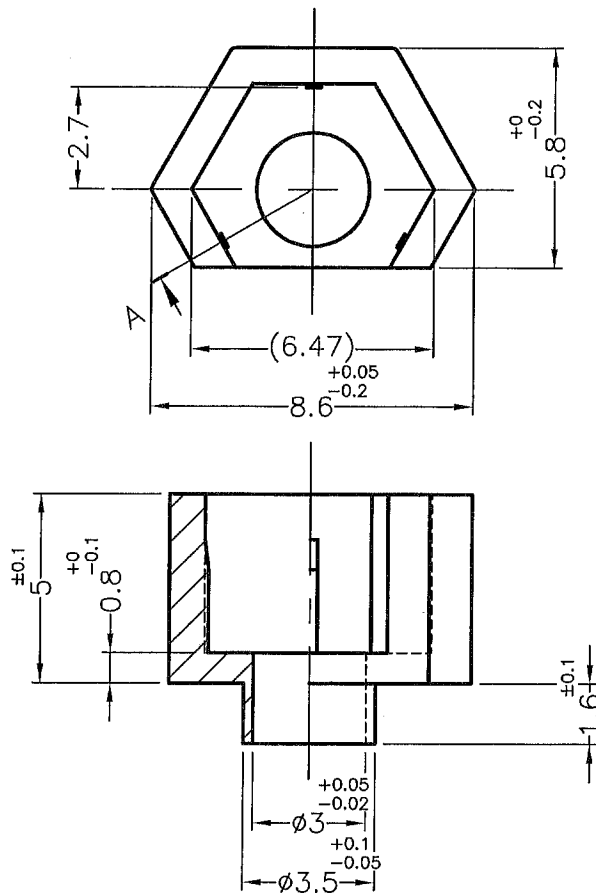

SECTION A-A

QMFZ2 Component - Plastics

Tuesday, May 25, 2004

E/7960

DSM ENGINEERING PLASTICS B.V.

POSTBUS 43 6130 AA SITTARD THE NETHERLANDS

Material Designation: TE250P6(h1)(j)

Product Description: Polyamide 46 (PA46), glass reinforced, flame retardant, designated "Stanyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAZ	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.35	V-0	-	-	-	-	-	-	-
	0.75	V-0	0	0	140	110	120	-	-
	1.5	V-0	0	0	140	125	125	-	-
	3	V-0	0	0	140	130	130	-	-

IEC CTI:

CTI: 2

HVTR: 1

D495: 6

Dielectric Strength (kV/mm): 25

Volume Resistivity (10¹⁰ ohm-cm): -

ISO Tensile Strength (N/mm²): -

ISO Flexural Strength (N/mm²): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

IEC Ball Pressure (C): -
Dimensional Stability (%): 6.0

ISO Heat Deflection (C): -

ISO Charpy Impact (kJ/m²): -

(h1)

Virgin and regrind, up to 50% by weight inclusive, in thicknesses of 0.75mm and greater, have the same basic material characteristics, except for CTI.


(i)

Virgin and regrind, up to 100% by weight inclusive, have the same basic material characteristics with respect to Flammability in the 0.75mm thickness and greater.

Report Date: 1/1/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE	BUSHING	產品規格圖面
				MATERIAL	NYLON 46 UL94V-0	DATE 2012.10.03
				FINISH		DRAWN C.S.L
				COLOR	NATURAL	CHECK 
PART NUMBER	TW-191N46	DRAWING NUMBER	TW-191N46	UNLESS OTHERWISE SPECIFIED TOLERANCE	±0.2	APPROVED 
SIZE	A4	SCALE	5:1	UNIT	mm	
				REV	A	