


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

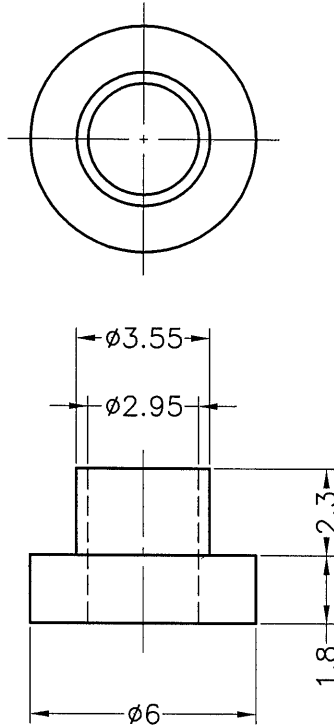

QMFZ2 Component - Plastics

Friday, October 24, 2003

E235269

NAN YA PLASTICS (HUI ZHOU) CORP LTD
YONGSHI DA DAO SHI WAN TOWN HUIZHOU GUANGDONG CHINA

Material Designation: **1403G6**

Product Description: Polybutylene Terephthalate (PBT), furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	3	0	130	130	140	-	-
	1.5	V-0	2	0	130	130	140	-	-
	3.0	V-0	2	0	130	130	140	-	-

CTI: 2

HVTR: 1

D495: 6

IEC Ball Pressure (°C): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁹ohm-cm): -

Dimensional Stability(%): -

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Heat Deflection (°C): -

ISO Tensile Impact (kJ/m²): -

ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

Report Date: 4/23/2003

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.		TITLE	TRANSISTOR WASHERS	SPEC. DWG.	
		MATERIAL	PBT UL94V-0	DATE	2007.10.18
		FINISH		DRAWN	BUNNY
		COLOR	NATURAL	CHECK	朱益霆
PART NUMBER	TW-88	DRAWING NUMBER	TW-88	UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE
SIZE	A4	SCALE	5:1	UNIT	mm
		REV	A	APPROVED	Kang