
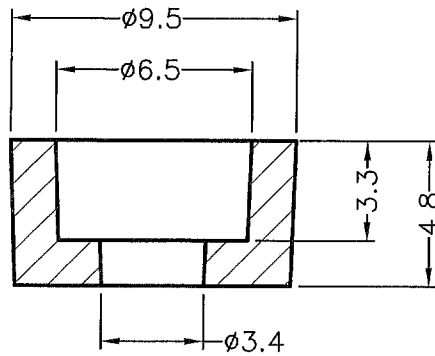


DIM	TOL
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

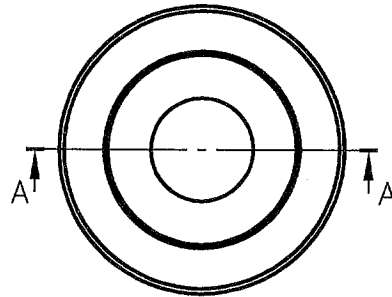

SECTION A-A

QMF22 Component - Plastics Friday, October 24, 2003 E44716

RHODIA ENGINEERING PLASTICS
 QUARTIER BELLE-ETOILE AVE RAMBOZ BOITE POSTALE 64 69192 ST FONS CEDEX FRANCE

Material Designation: B 50H1(r1)
 Product Description: Polyamide 66/6 (PA66/6), designated "Technyl" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.38	V-0	4	0	120	-	-	-	-
	0.75	V-0	4	0	120	90	95	-	-
BK	1	V-0, 5VB	4	0	120	90	95	-	-
	1.5	V-0	4	0	120	90	95	-	-
	3	V-0	3	0	120	90	95	-	-

CTI: 0 HVTR: 0 D495: 6

Dielectric Strength (kV/mm): - Volume Resistivity (Ω·cm): - IEC Ball Pressure (C): -
 ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): - Dimensional Stability(%): -
 ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): - ISO Heat Deflection (C): -
 ISO Charpy Impact (kJ/m²): -

(r1) Virgin and regrind up to 50% by weight incl. have the same basic material characteristics, except for the 5VB rating.

Report Date: 10/21/1993

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices a

<p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p>		TITLE	SPACER SUPPORT	SPEC. DWG.
		MATERIAL	NYLON 66 UL94V-0	DATE
PART NUMBER		FINISH	COLOR	DRAWN
U-28V0(B)			BLACK	Lyu
DRAWING NUMBER		CHECK	UNLESS OTHERWISE SPECIFIED TOLERANCE	APPROVED
U-28V0(B)			SEE ABOVE	
SIZE	SCALE	UNIT	REV	
A4	4:1	mm	A	