


REVISIONS			
REV	DESCRIPTION	DATE	BY

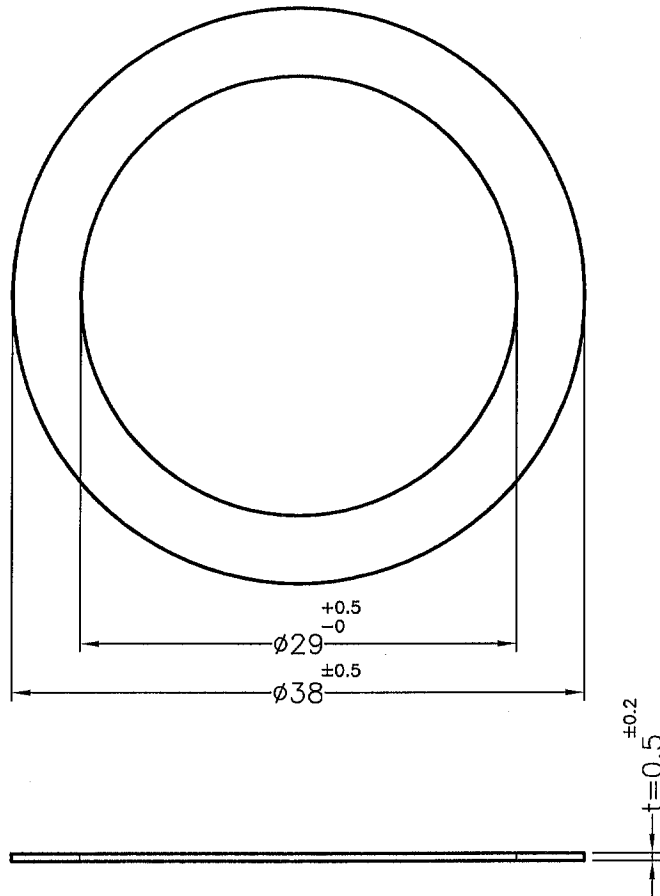

Material hardness before injection: 85A±3A
 Material hardness after injection: 85A±10A

Component - Plastics

E140250

ELASTOGRAN GMBH

GE9CHAEFTSBEREICH SYSTEME, LANDWEHRWEG, LEMFOERDE 49448 DE

S85 A (a) 000

Polyurethane (PUR), "Elastollan", furnished as granular material

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
NC	0.95	HB	-	-	50	50	50

Comparative Tracking Index (CTI): -

Dimensional Stability (%): -

High-Voltage Arc Tracking Rate (HVTR): -

High Volt, Low Current Arc Resis (D495): -

Dielectric Strength (kV/mm): -

Volume Resistivity (10⁸ ohm-cm): -

(a) - Denotes any two digit number 00 to 99 inclusive, indicating shape of granulate and lubricant


UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

Report Date: 1991-08-08

Last Revised: 2003-10-24

Underwriters Laboratories Inc®



 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE	WASHER	SPEC. DWG.
				MATERIAL	TPU	DATE 2010.08.12
				HARDNESS	SEE ABOVE	DRAWN Eric
				COLOR	NATURAL	CHECK 
PART NUMBER WS2905U	DRAWING NUMBER WS2905U	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 		
SIZE A4	SCALE 2:1	UNIT mm	REV A			