


| DIM.     | TOL  |
|----------|------|
| 5mm DOWN | ±0.2 |
| 5~20mm   | ±0.3 |
| 20~40mm  | ±0.4 |
| 40~60mm  | ±0.5 |
| 60~100mm | ±0.8 |
| 100mm UP | ±1.0 |

| REVISIONS |             |      |    |
|-----------|-------------|------|----|
| REV       | DESCRIPTION | DATE | BY |
|           |             |      |    |
|           |             |      |    |

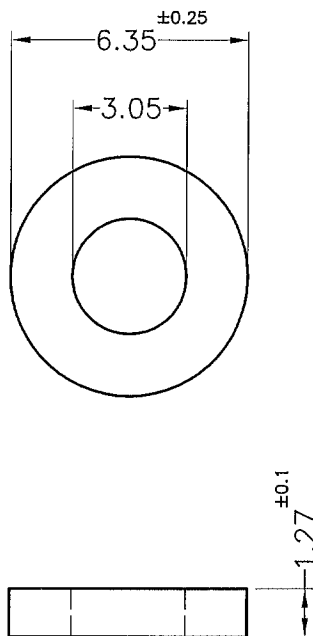

QMF22 Component - Plastics  
E I DUPONT DE NEMOURS & CO INC  
ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880

Wednesday, September 15, 2004

B41938

Material Designation: 101(+)(f1), 101F(+)(f1), 101L(+)(f1), 101(+)(f1), 101L(f1), 132F(+)(f1), 135F(+)(f1)  
Product Description: Polyamide 66 (PA66), designated "Zytel" furnished as pellets.

| Color | Min. Thick. (mm) | Flame Class | HWI | HAI | RTI Elec | RTI Imp | RTI Str | IEC GWIT | IEC GWFI |
|-------|------------------|-------------|-----|-----|----------|---------|---------|----------|----------|
| ALL   | 0.71             | V-2         | 4   | 0   | 130      | 75      | 85      | 725      | 960      |
|       | 1.5              | V-2         | 3   | 0   | 130      | 75      | 85      | 750      | 960      |
|       | 3                | V-2         | 2   | 0   | 130      | 75      | 85      | 800      | 960      |
|       | 6                | V-2         | 2   | 0   | 130      | 75      | 85      | 800      | 960      |

CTI: 0

HVTR: 0

D495: 6

Dielectric Strength (kV/mm): 13

Volume Resistivity (10<sup>9</sup>ohm-cm): 14

ISO Tensile Strength (MPa): -

ISO Flexural Strength (MPa): -

ISO Tensile Impact (kJ/m<sup>2</sup>): -

ISO Izod Impact (kJ/m<sup>2</sup>): -

(+) Virgin and reground up to 50% by weight inclusive, have the same basic material characteristics.

(f1) Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" or "MIN" or "ZEN" or "DEL" or "CRA" or "RYN".

Report Date: 7/29/1996

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

康揚企業股份有限公司  
KANG YANG HARDWARE ENTERPRISE CO., LTD.  
東莞康揚塑膠五金電子廠  
DONG GUAN KANG YANG PLASTIC HARDWARE COMPANY  
康哲電腦配件(吳江)有限公司  
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

|             |                |
|-------------|----------------|
| PART NUMBER | DRAWING NUMBER |
| WS63530512  | WS63530512     |
| SIZE        | SCALE          |
| A4          | 5:1            |
| UNIT        | REV            |
| mm          | A              |

|                                      |                  |            |
|--------------------------------------|------------------|------------|
| TITLE                                | WASHER           | SPEC. DWG. |
| MATERIAL                             | NYLON 66 UL94V-2 | DATE       |
| FINISH                               |                  | DRAWN      |
| COLOR                                | NATURAL          | CHECK      |
| UNLESS OTHERWISE SPECIFIED TOLERANCE | SEE ABOVE        | APPROVED   |

陳明得

*[Signature]*