
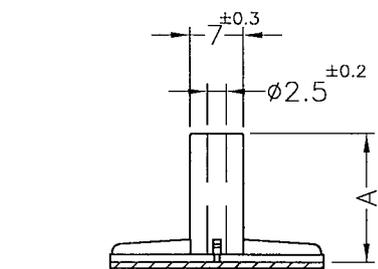


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0




DOUBLE ADHESIVE TAPE

PART NO.	A	DOUBLE ADHESIVE TAPE
ASR-5	4.2	3M 1600T THICKNESS=1.1mm
ASR-8	7.2	
ASR-9	8.2	
ASR-12.7	11.9	
ASR-14.5	13.6	
ASR-15.9	15.1	
ASR-17.5	16.3	
ASR-19.1	18.3	
ASR-5(3M)	4.2	
ASR-8(3M)	7.2	
ASR-9(3M)	8.2	
ASR-12.7(3M)	11.9	
ASR-14.5(3M)	13.6	
ASR-15.9(3M)	15.1	
ASR-17.5(3M)	16.3	
ASR-19.1(3M)	18.3	
ASR-28.5(3M)	27.6	

NOTE: 1. THE PRODUCT SIZE IS NOT INCLUDED THE SIZES OF ADHESIVE TAPE AND ITS LINER.

- 產品尺寸皆不含背膠及離型紙。
2. IT IS HAND-CUT ADHESIVE TAPE, SO CAN NOT PERFECTLY STICK EVENLY. IT IS POSSIBLE TO HAVE SOME PORTION EXPOSED OR SHRINKING INWARD. THIS IS A NORMAL PHENOMENON.
此為手工背膠, 貼附無法非常平整, 會有外露或內縮屬正常現象。
3. THE COLOR BATCH TEST REPORT IS ONLY FOR FIRST LOT TEST.
色母環保檢測報告, 僅提供原始測試報告。
4. SHRINKING IS NORMAL STATUS.
內縮為正常現象。
5. MADE OF EQUIVALENT MATERIAL.
可使用同等材質。
6. 膠帶使用建議(依美商3M公司台灣子公司建議):
- ①依3M建議欲達最佳黏著, 黏貼表面必須清潔與乾燥
 - ②依3M建議以平均施以約15psi(1.05kg/cm²)之壓力
 - ③依3M建議使用溫度在15°C至38°C之間, 勿低於10°C
 - ④依3M建議儲存環境為21°C和50%相對濕度, 可避免因未確實密封及存放, 會有背膠黃化現象



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司
บริษัท กัง ยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
KANG YANG HARDWARE (THAILAND) CO., LTD.
康揚越南有限公司
CÔNG TY TNHH KANG YANG VIỆT NAM
KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE	TITLE	DWG. NO.	PART NO.	
	2007.11.06	PCB SPACER	ASR-H	SEE ABOVE	
	DRAWN	MATERIAL		SIZE A4	SPEC. DWG.
	BUNNY	NYLON 66(PA66) UL94V-2	SCALE: NONE		
CHECKED	COLOR	FINISH			
[Yuping]	NATURAL				
APPROVED	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE				
[Signature]					