




| DIM. | TOL. |
|-----------|------|
| L≤10 | ±0.2 |
| 10<L≤30 | ±0.3 |
| 30<L≤50 | ±0.5 |
| 50<L≤100 | ±0.7 |
| 100<L≤250 | ±1.2 |
| ABOVE 250 | ±1.5 |

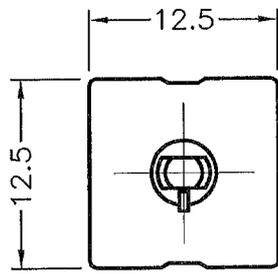

| REVISIONS | | | |
|-----------|-------------|------|----|
| REV | DESCRIPTION | DATE | BY |
| | | | |

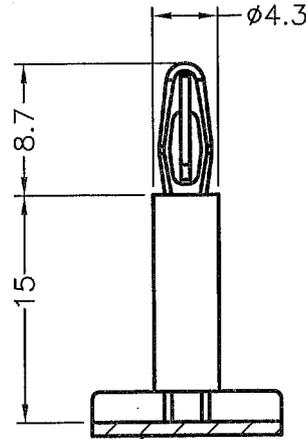

HOLE IN P.C.B $\phi 3.2$
P.C.B THICKNESS 1.6

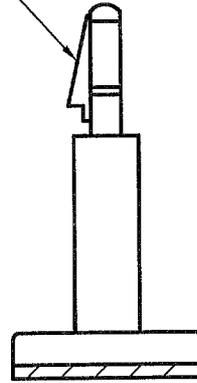

3M
DOUBLE ADHESIVE TAPE

| PART NO. | DOUBLE ADHESIVE TAPE |
|--------------|--------------------------|
| JSS-15.9 | 3M 1600T THICKNESS=1.1mm |
| JSS-15.9(3M) | 3M 1690T THICKNESS=0.9mm |

NOTE:1. The height is not included thickness of adhesive tape and separate paper.
2. The adhesive tape is cut by hand, it is normal if there is a not unified edge.


Component - Plastic E41838
E I DUPONT DE NEMOURS & CO INC
ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19060
101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)
Polyamide 66 (PA66), "Zytel", furnished as pellets

| Color | Min Thk (mm) | Flame Class | HWI | HAI | RTI Elec | RTI Imp | RTI Str |
|-------|--------------|-------------|-----|-----|----------|---------|---------|
| ALL | 0.71 | V-2 | 4 | 0 | 130 | 75 | 85 |
| | 1.6 | V-2 | 3 | 0 | 130 | 75 | 85 |
| | 3.0 | V-2 | 2 | 0 | 130 | 75 | 85 |
| | 6.0 | V-2 | 2 | 0 | 130 | 75 | 85 |

Comparative Tracking Index (CTI): 0
Dielectric Strength (kV/mm): 13
High-Voltage Arc Tracking Rate (HVTR): 0
Dimensional Stability (%):
(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.
NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZVT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "GRA" for Crastin or "RYN" for Rynite or "ETPV" for ETPV grades.
r9 - Virgin and regrind up to 65% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thicknesses 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrid exceeding 25% is limited to V-2 Flammability for WT, RD, BK.
ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date: 1993-07-28
Last Revised: 2010-07-27
© 2011 Underwriters Laboratories Inc.

NYLON 66 UL94V-2 or EQUIVALENT

| | | | | |
|--|------------------------------|------------|---|---|
|  <p>康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.</p> | TITLE SPACER SUPPORT | | SPEC. DWG. | |
| | MATERIAL NYLON 66 UL94V-2 | | DATE 2011.07.08 | |
| | FINISH | | DRAWN C. S. L | |
| | COLOR NATURAL | | CHECK | |
| PART NUMBER SEE ABOVE | DRAWING NUMBER JSS-15.9 | | APPROVED  | |
| SIZE A4 | SCALE 2:1 | UNIT mm | REV B | UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE |