



| DIM. | TOL |
|---------------|------|
| L ≤ 10 | ±0.2 |
| 10 < L ≤ 30 | ±0.3 |
| 30 < L ≤ 50 | ±0.5 |
| 50 < L ≤ 100 | ±0.7 |
| 100 < L ≤ 250 | ±1.2 |
| ABOVE 250 | ±1.5 |

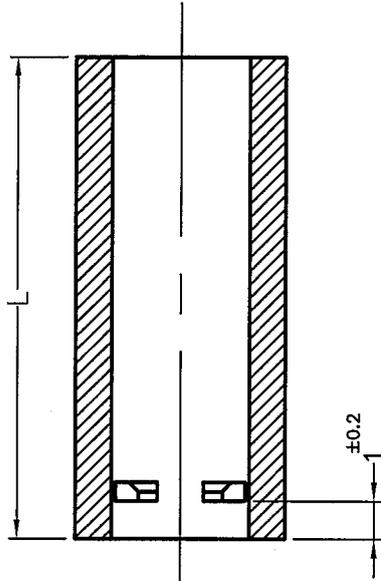

SECTION A-A

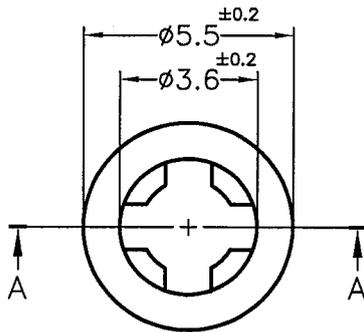

| PART NO. | L |
|-----------|------|
| KWH3-1.5 | 1.5 |
| KWH3-2 | 2.0 |
| KWH3-3 | 3.0 |
| KWH3-3.5 | 3.5 |
| KWH3-4 | 4.0 |
| KWH3-5 | 5.0 |
| KWH3-6 | 6.0 |
| KWH3-6.3 | 6.3 |
| KWH3-7 | 7.0 |
| KWH3-8 | 8.0 |
| KWH3-9 | 9.0 |
| KWH3-9.5 | 9.5 |
| KWH3-10 | 10.0 |
| KWH3-11 | 11.0 |
| KWH3-11.5 | 11.5 |
| KWH3-12 | 12.0 |
| KWH3-12.7 | 12.7 |
| KWH3-13 | 13.0 |
| KWH3-14 | 14.0 |

| PART NO. | L |
|-----------|------|
| KWH3-15 | 15.0 |
| KWH3-15.9 | 15.9 |
| KWH3-16 | 16.0 |
| KWH3-17 | 17.0 |
| KWH3-18 | 18.0 |
| KWH3-19 | 19.0 |
| KWH3-20 | 20.0 |
| KWH3-21 | 21.0 |
| KWH3-22 | 22.0 |
| KWH3-23 | 23.0 |
| KWH3-24 | 24.0 |
| KWH3-25 | 25.0 |
| KWH3-25.4 | 25.4 |
| KWH3-26 | 26.0 |
| KWH3-27 | 27.0 |
| KWH3-28 | 28.0 |
| KWH3-29 | 29.0 |
| KWH3-30 | 30.0 |

NOTE: MADE OF EQUIVALENT MATERIAL.
均可使用同等材質.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

| | | | | | | | |
|---|----------|------------|---------------------------------------|------------------|----------|--------------|-----|
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING | DATE | 2011.12.23 | TITLE | SPACER SUPPORT | DWG. NO. | PART NO. | |
| | DRAWN | ROBERT | MATERIAL | NYLON 66 UL94V-2 | KWH3-H | SEE ABOVE | |
| | CHECKED | | COLOR | NATURAL | FINISH | SIZE | REV |
| | APPROVED | | UNLESS OTHERWISE SPECIFIED TOLERANCE: | SEE ABOVE | A4 | SPEC. DWG. | E |
| | | | SCALE: 5:1 | UNIT | mm | SHEET 1 OF 1 | |