




DIM.	TOL.
5mm DOWN.	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP.	±1.0

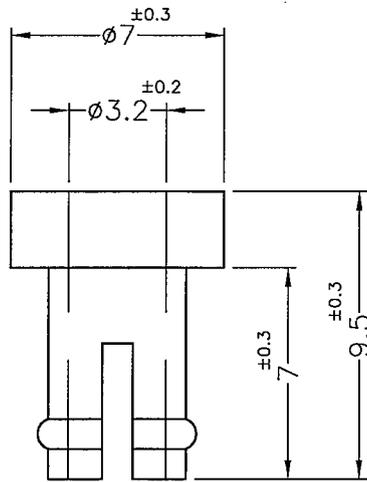

PIN(RSS-1)

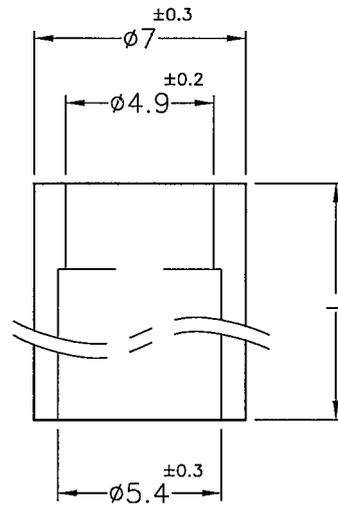

BODY

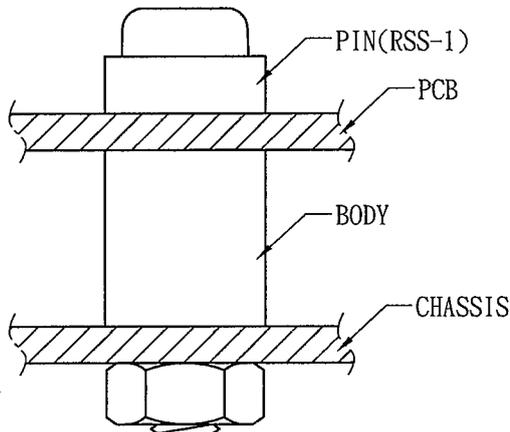

HOLE IN PCB:  $\phi 5.0\text{mm}$

HOLE IN CHASSIS:  $\phi 3.5$  or M3 TAPPING

INSTALLATION DIAGRAM

(安裝示意圖)

SCALE 3:1

PART NO.	L
RSS-60	6.0
RSS-78	7.8
RSS-105	10.5
RSS-150	15.0
RSS-160	16.0
RSS-170	17.0
RSS-180	18.0
RSS-200	20.0
RSS-250	25.0

NOTE:1. SHRINKING IS NORMAL STATUS.

內縮為正常現象。

2. MADE OF EQUIVALENT MATERIAL.

均可使用同等材質。



康揚企業股份有限公司

KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司

KANG YANG PLASTIC(DONG GUAN)CO.,LTD.

康哲電腦配件(吳江)有限公司

KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN  
THIS DRAWING IS THE SOLE PROPERTY  
OF KANG YANG HARDWARE  
ENTERPRISE CO. ANY  
REPRODUCTION IN PART OR AS A  
WHOLE WITHOUT THE WRITTEN  
PERMISSION OF  
KANG YANG HARDWARE ENTERPRISE  
CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE  
1999.09.02

DRAWN  
S.J.C

CHECKED  
李柏宥

APPROVED  
Kang

TITLE  
ROUND SPACER

MATERIAL  
NYLON 66 UL94V-2

COLOR  
NATURAL

FINISH  
UNLESS OTHERWISE SPECIFIED  
TOLERANCE: SEE ABOVE

DWG. NO.

RSS-H

SIZE  
A4

SCALE: 4:1

PART NO.

SEE ABOVE

SPEC. DWG.

REV  
B

UNIT  
mm

SHEET 1 OF 1