
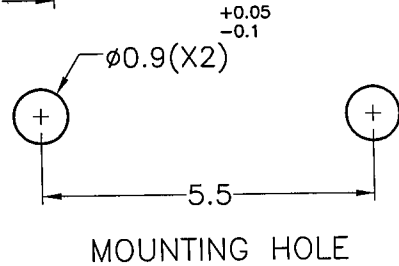
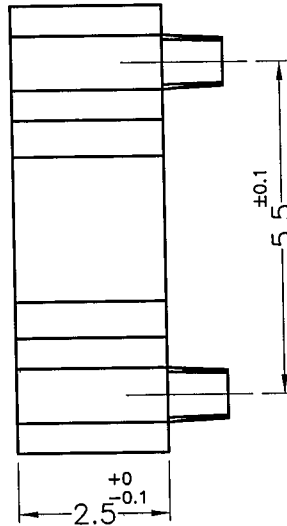
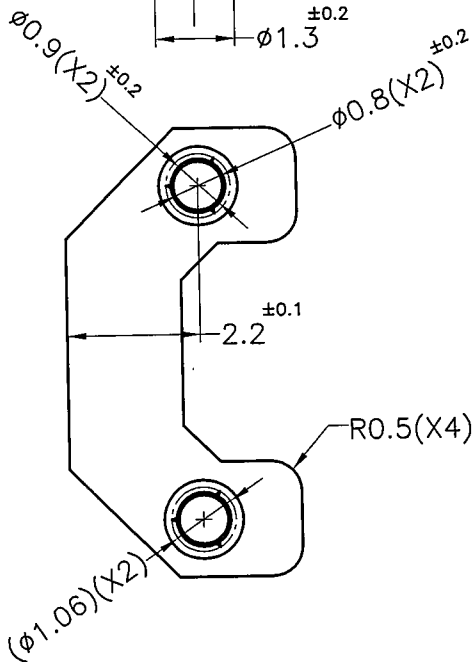
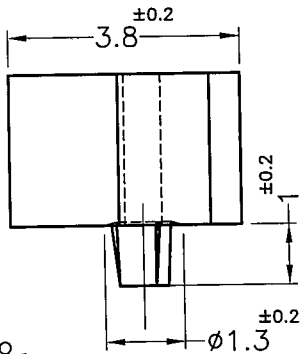


REVISIONS			
REV	DESCRIPTION	DATE	BY

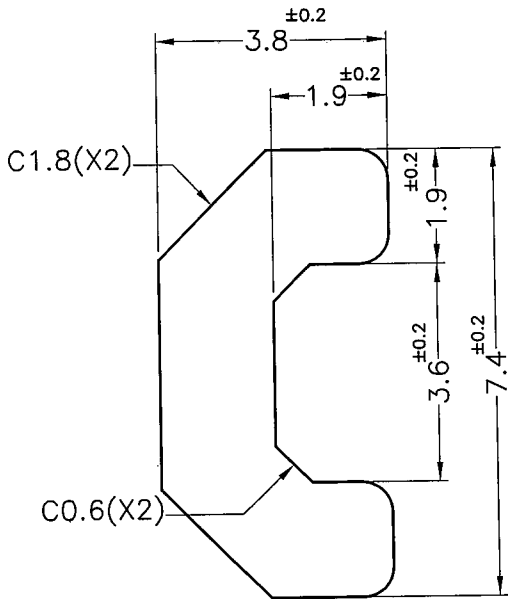

Component - Plastics

E121562

SABIC INNOVATIVE PLASTICS US L L C
AMERICAS - RESIN, 1 PLASTICS AVE, PITTSFIELD MA 01201

945(GG)

Polycarbonate (PC), "Lexan", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str
ALL	0.8	V-2	3	4	130	120	125
	1.1	V-0	3	4	130	120	125
	1.5	V-0	3	3	130	120	125
	3.0	V-0, 5VA	2	3	130	120	130

Comparative Tracking Index (CTI): 2

Dimensional Stability (%): 0

High-Voltage Arc Tracking Rate (HVTR): 4

High Volt, Low Current Arc Resis (D495): 7

Dielectric Strength (kV/mm): 33



Volume Resistivity (10^4 ohm-cm): 15

(GG) - Denotes a global grade as covered in Recognized Component File E161759

NOTE - Material designation may be followed by a color nomenclature consisting of either an alpha/numeric or numeric/alpha combination.

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.


康揚企業股份有限公司
 KANG YANG HARDWARE ENTERPRISE CO., LTD.
康揚塑膠(東莞)有限公司
 KANG YANG PLASTIC(DONG GUAN)CO.,LTD.
康哲電腦配件(吳江)有限公司
 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.

TITLE	零件座	產品規格圖面
MATERIAL	PC UL94V-0	DATE 2009.09.15
FINISH		DRAWN SAI
COLOR	BLACK	CHECK 
UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED 

PART NUMBER	EMD-25V0(B)			DRAWING NUMBER	EMD-25		
SIZE	A4	SCALE	8:1	UNIT	mm	REV	A