


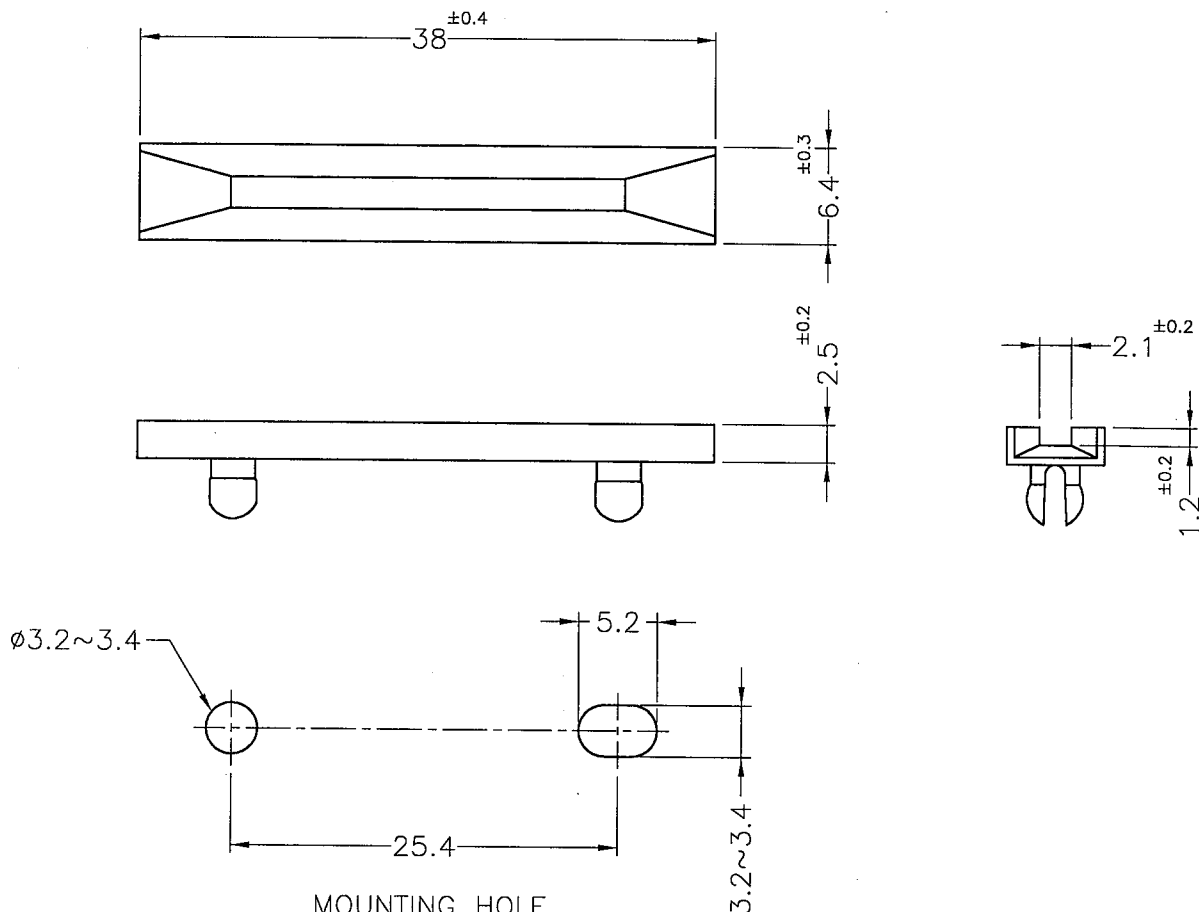

MOUNTING HOLE
THICKNESS: $0.8 \sim 1.2$ mm
(RECOMMEND FOR REFERENCE ONLY)

NOTE: 1. SHRINKING IS NORMAL STATUS.

內縮為正常現象。

2. MADE OF PLASTIC OR EQUIVALENT MATERIALS.

塑膠製品或同等材質。



ISO 9001
ISO 14001
QC 080000
IATF 16949

康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO., LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO., LTD.

康揚塑膠五金(泰國)有限公司

บริษัท ห้าง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด

KANG YANG HARDWARE (THAILAND) CO., LTD.

康揚越南有限公司

CÔNG TY TNHH KANG YANG VIỆT NAM

KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED. DO NOT SCALE DRAWING	DATE 2025.09.19	TITLE PCB CARD GUIDE	DWG. NO. CG-38S		PART NO. CG-38S	
	DRAWN FORSEN	MATERIAL NYLON 66(PA66) UL94V-2	SIZE A4		SPEC. DWG.	
	CHECKED [Signature]	COLOR NATURAL				
	APPROVED [Signature]	UNLESS OTHERWISE SPECIFIED TOLERANCE: SEE ABOVE	SCALE: 2:1		UNIT mm	REV A
					SHEET 1 OF 1	