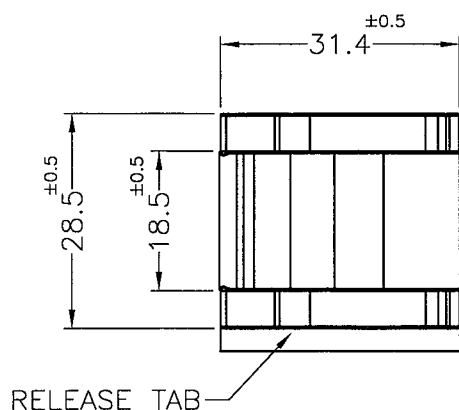


MAXIMUM CABLE
ø15.7

NOTE:1. THE PRODUCT SIZE IS INCLUDED ADHESIVE TAPE WITHOUT THE LINER THICKNESS.

產品尺寸含背膠但不含離型紙厚度。

2. IT IS HAND-CUT ADHESIVE TAPE, SO CAN NOT PERFECTLY STICK EVENLY. IT IS POSSIBLE TO HAVE SOME PORTION EXPOSED OR SHRINKING INWARD. THIS IS A NORMAL PHENOMENON.

此為手工背膠，貼附無法非常平整，會有外露或內縮屬正常現象。

3. SHRINKING IS NORMAL STATUS.

內縮為正常現象。

4. DIRECTION FOR EASY RELEASE LINER TAPE IS FOR REFERENCE ONLY.

易撕型膠帶方向性僅供參考。

5. TAPE USAGE RECOMMENDATIONS (PER 3M TAIWAN SUBSIDIARY GUIDELINES):

膠帶使用建議(依美商3M公司台灣子公司建議):

①PER 3M RECOMMENDATION, BONDING SURFACES MUST BE CLEAN AND DRY TO ACHIEVE OPTIMAL ADHESION.

依3M建議欲達最佳黏著，黏貼表面必須清潔與乾燥。

②PER 3M RECOMMENDATION, APPLY APPROXIMATELY 15 PSI (1.05 KG/CM²) OF UNIFORM PRESSURE DURING BONDING.

依3M建議黏貼時以平均施以約15psi(1.05kg/cm²)之壓力。


③PER 3M RECOMMENDATION, BONDING SHOULD BE PERFORMED AT TEMPERATURES BETWEEN 15°C TO 38°C, AND NOT BELOW 10°C.

依3M建議黏貼時使用溫度在15°C至38°C之間，勿低於10°C。

④PER 3M RECOMMENDATION, STORAGE ENVIRONMENT SHOULD BE 21°C AND 50% RH TO AVOID ADHESIVE DISCOLORATION CAUSED BY IMPROPER SEALING OR STORAGE.

依3M建議儲存環境為21°C和50%相對濕度，

可避免因未確實密封及存放，會有背膠黃化現象。



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN)CO.,LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG)CO.,LTD.

康揚塑膠五金(泰國)有限公司

บริษัท คง ยาง ฮาร์ดแวร์ (ไทยแลนด์) จำกัด
KANG YANG HARDWARE (THAILAND) CO., LTD.

康揚越南有限公司

CÔNG TY TNHH KANG YANG VIỆT NAM
KANG YANG VIETNAM CO., LTD.

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KANG YANG HARDWARE ENTERPRISE CO. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KANG YANG HARDWARE ENTERPRISE CO. IS PROHIBITED.

DO NOT SCALE DRAWING

DATE
2025.12.10

DRAWN
Terry

CHECKED

APPROVED

TITLE
WIRE SADDLE

MATERIAL
NYLON 66(PA66) UL94V-2

COLOR
NATURAL

FINISH
UNLESS OTHERWISE SPECIFIED
TOLERANCE: SEE ABOVE

DWG. NO.

WCL-32(3M)AD

SIZE
A4

SCALE: 1:1

PART NO.

WCL-32(3M)AD

SPEC. DWG.

REV
A

UNIT
mm

SHEET 1 OF 1