


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REVISIONS			
REV	DESCRIPTION	DATE	BY

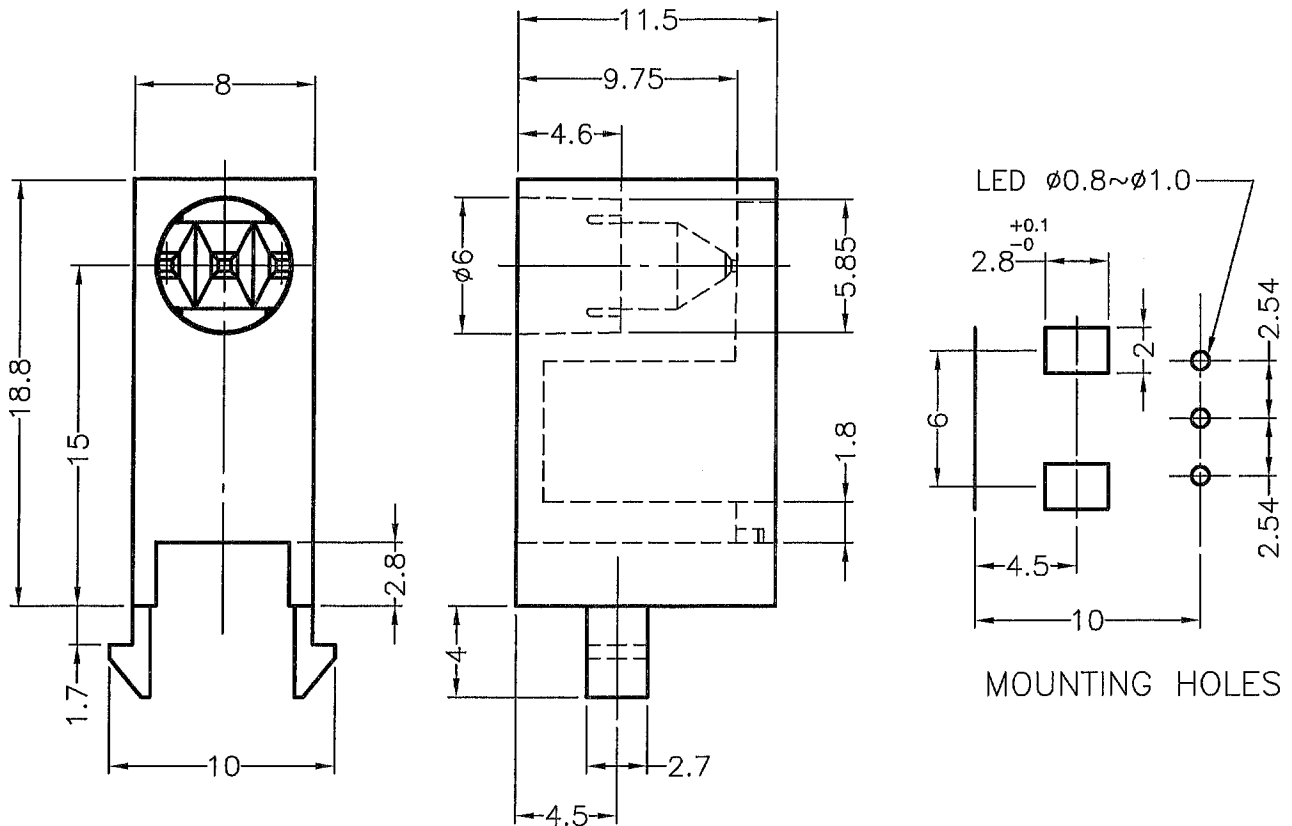

NOTE: All measurement does not include gate which raises under 1.2mm.

Component - Playoffs

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 39713, WILMINGTON DE 19880

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)

Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HAZ	RTI Elec	RTI Imp	RTI Str
ALL	8.74	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	6.0	V-2	2	0	130	75	85

Comperative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HVTR): 0

Dimensional Stability (%): -

Inclined Plane Tracking (IPT): -

Volume Resistivity (10⁹ ohm-cm): 14

High Volt, Low Current Arc Tests (D495): 6

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers, (2) Material designations may be prefixed by "ZYT" for Zytel or "HLS" for Hylon or "DEL" for Delrin or "GRA" for Grastic or "RVP" for Rynite or "ETPV" for ETPV grades.

r9 - Virgin and regrip up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.7mm. For thicknesses 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regrip exceeding 20% is limited to V-2 Flammability for WT, RD, BK.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related products. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances. Where the acceptability of the combination is determined by UL.

Report Date: 1998-07-23

Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE LED SPACER SUPPORT		SPEC. DWG.	
PART NUMBER LEK-517				MATERIAL NYLON 66 UL94V-2 or EQUIVALENT		DATE 2003.01.13	
DRAWING NUMBER LEK-517				HARDNESS		DRAWN JASON	
SIZE A4				COLOR BLACK		CHECK 	
SCALE 3:1				UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	
UNIT mm				REV C			