


REVISIONS			
REV	DESCRIPTION	DATE	BY

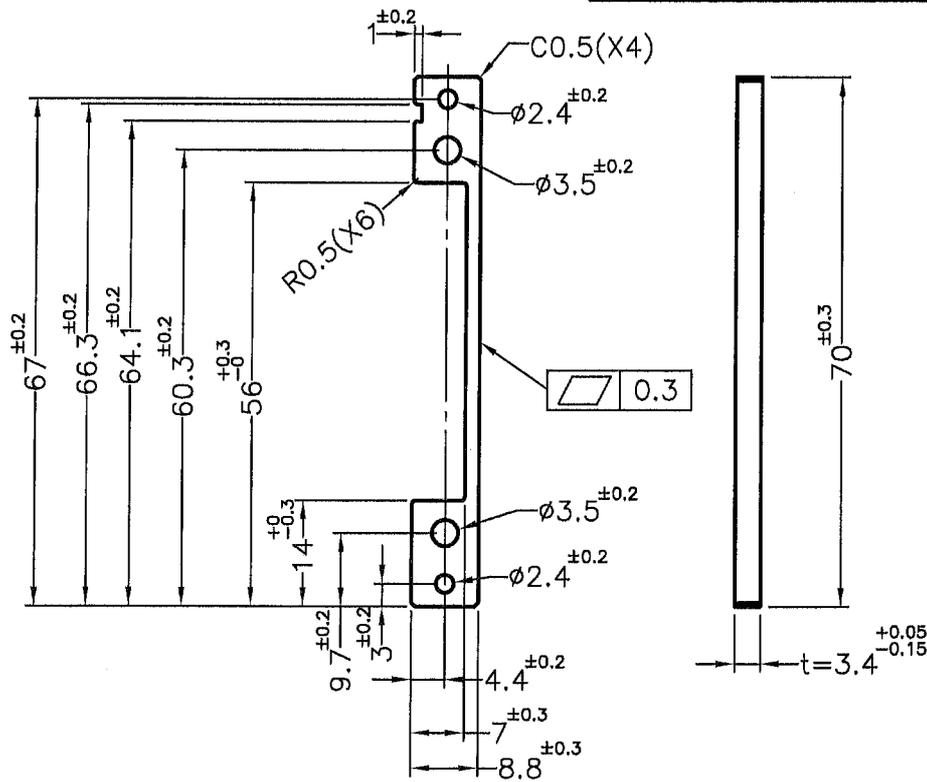

Component - Plastics

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 80713, WILMINGTON DE 19880-0713

HTNFR52G30NH(r6)

Polyamide 6T/66 (PA6T/66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI		RTI		RTI Str
			HWI	HAI	Elec	Imp	
ALL	0.40	V-0	4	0	140	-	-
	0.75	V-0	0	0	140	115	125
	1.5	V-0	0	0	140	115	125
	3.0	V-0	0	0	140	120	130

Comparative Tracking Index (CTI): 0  
 Dielectric Strength (kV/mm): -  
 High-Voltage Arc Tracking Rate (HVTR): 0  
 Dimensional Stability (%): -  
 Inclined Plane Tracking (IPT): -  
 Volume Resistivity (10<sup>6</sup> ohm-cm): -  
 High Volt. Low Current Arc Resis (D495): 4

(r6) - Virgin and regrind up to 50% by weight inclusive have the same flammability characteristics in the natural and black colors only.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MIN" for Minlon or "DEL" for Delrin or "CRA" for Crastin or "RYN" for Rynite or "ETPV" for ETPV or "SOR" for Sorona grades.

ANSI/UL 94 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product devices and appliances, where the acceptability of the combination is determined by UL.

Report Date:1996-08-22  
 Last Revised:2012-11-15

© 2014 UL LLC



DELTA P/N:347048100000

TITLE	SPACER	SPEC. DWG.
MATERIAL	NYLON 6T UL94V-0+GF	DATE 2010.10.01
FINISH		DRAWN T. C
COLOR	WHITE	CHECK 
UNLESS OTHERWISE SPECIFIED TOLERANCE	SEE ABOVE	APPROVED Kang

康揚企業股份有限公司  
 KANG YANG HARDWARE ENTERPRISE CO., LTD.  

 康揚塑膠(東莞)有限公司  
 KANG YANG PLASTIC(DONG GUAN) CO., LTD.  

 康哲電腦配件(吳江)有限公司  
 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

PART NUMBER	EMD-109V0W	DRAWING NUMBER	EMD-109
SIZE	A4	SCALE	1:1
UNIT	mm	REV	A