


成型尺寸	公差
L≤10	±0.2
10<L≤30	±0.3
30<L≤50	±0.5
50<L≤100	±0.7
100<L≤250	±1.2
ABOVE 250	±1.5

REVISIONS			
REV	DESCRIPTION	DATE	BY

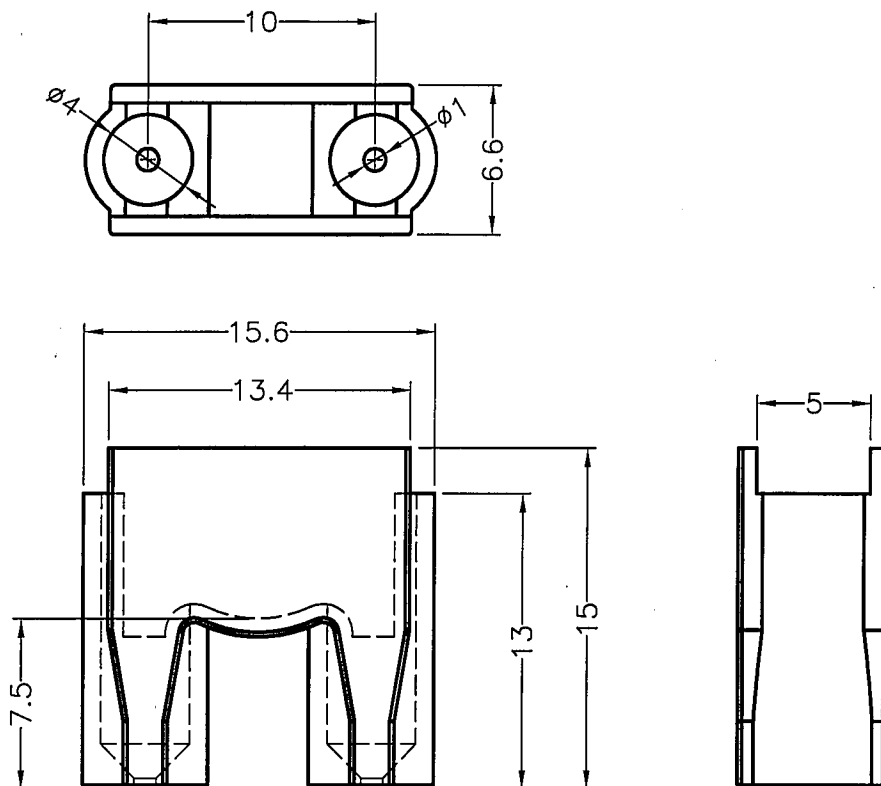

QMFZ2 Component -

Friday, October 24, 2003

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS CHESTNUT RUN PLAZA PO BOX 80713 WILMINGTON DE 19880

Material Designation: FR7025V0F(+)

Product Description: Polyamide 66 (PA66), flame retardant, designated "Zytel" furnished as pellets.

Color	Min. Thick. (mm)	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
ALL	0.75	V-0	3	0	130	75	85	775	960
	1.5	V-0	3	0	130	75	85	775	960
	3	V-0	1	0	130	75	85	775	960

CTI: 0 IEC CTI HVTR: 0

D495: -

IEC Ball Pressure (C): -

(V): -

Dielectric Strength (kV/mm): 18

Volume Resistivity (10⁹ohm-cm): 12

Dimensional Stability(%): 0

ISO Tensile Strength (MPa): - ISO Flexural Strength (MPa): -

ISO Heat Deflection (C): -

ISO Tensile Impact (kJ/m²): - ISO Izod Impact (kJ/m²): -

ISO Charpy Impact (kJ/m²): -

(+) Virgin and regrind up to 50% by weight inclusive, have the same basic material characteristics.

NOTE (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" or "MIN" or "ZEN" or "DEL" or "CRA" or "RYN".

Report Date: 8/2/1996

Underwriters Laboratories Inc®

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.

 康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN) CO., LTD. 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.				TITLE 電容座		產品規格圖面	
				MATERIAL NYLON 66 UL94V-0		DATE 2011.12.05	
PART NUMBER PHC-13V0				FINISH		DRAWN SAI	
DRAWING NUMBER PHC-13V0				COLOR NATURAL		CHECK 	
SIZE A4	SCALE 3:1	UNIT mm	REV A	UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 