


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0

REV	REVISIONS	DATE	BY
	DESCRIPTION		

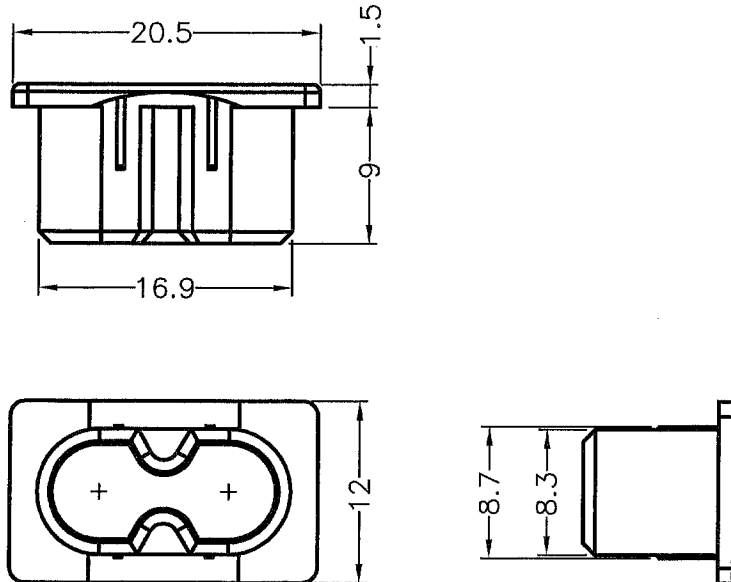

Component - Plastic

E41938

E I DUPONT DE NEMOURS & CO INC

ENGINEERING POLYMERS, CHESTNUT RUN PLAZA, PO BOX 99713, WILMINGTON DE 19890

101(r9)(f1), 101F(r9)(f1), 101L(r9)(f1), E101(r9)(f1), E101L(r9)(f1)

Polyamide 66 (PA66), "Zytel", furnished as pellets

Color	Min Thk (mm)	Flame Class	HWI	HA1	RTI Elec	RTI Imp	RTI Str
ALL	0.71	V-2	4	0	130	75	85
	1.5	V-2	3	0	130	75	85
	3.0	V-2	2	0	130	75	85
	5.0	V-2	2	0	130	75	85

Comparative Tracking Index (CTI): 0

Dielectric Strength (kV/mm): 13

High-Voltage Arc Tracking Rate (HVTR): 0

Dimensional Stability (%): -

(f1) - Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C.

NOTE - (1) Material designations that are color pigmented may be followed by suffix letters and numbers. (2) Material designations may be prefixed by "ZYT" for Zytel or "MNE" for Minlon or "DEL" for Delrin or "GRA" for Graston or "RYN" for Rynite or "ETPV" for ETPV grades.

rs - Virgin and regraded up to 50% by weight inclusive, have the same basic material characteristics for ALL colors down to 0.71mm. For thickness 0.40mm to 0.70mm the same basic material characteristics exist with the exception of generic RTI for all properties and Regraded exceeding 25% is limited to V-2 Flammability for WT, RD, BA.

ANSI/ASME B4 small-scale test data does not pertain to building materials, furnishings and related contents. ANSI/ASME B4 small-scale test data is intended solely for determining the flammability of plastic materials used in the components and parts of end-product designs and applications, where the acceptability of the combination is determined by UL.

Report Date: 1995-07-20
Last Revised: 2010-07-27

© 2011 Underwriters Laboratories Inc.



康揚企業股份有限公司
KANG YANG HARDWARE ENTERPRISE CO., LTD.

康揚塑膠(東莞)有限公司
KANG YANG PLASTIC(DONG GUAN) CO., LTD.

康哲電腦配件(吳江)有限公司
KANG CHE COMPUTER COMPONENTS(WUJIANG) CO., LTD.

TITLE POWER CONNECTOR COVER		SPEC. DWG.	
MATERIAL NYLON 66 UL94V-2		DATE 2009.02.11	
FINISH		DRAWN SAI	
COLOR BLACK		CHECK 	
UNLESS OTHERWISE SPECIFIED TOLERANCE SEE ABOVE		APPROVED 	

PART NUMBER PLC-2		DRAWING NUMBER PLC-2	
SIZE A4	SCALE 2:1	UNIT mm	REV A